

NAO⁶

PRELIMINARY
MARKETING
DATASHEET



NAO⁶



MODEL: H25600

P.2

PHYSICAL CHARACTERISTICS

GENERAL

Size (HxDxW)	574x311x275 mm / 22.6x12.2x10.8 in
Weight	5.48 kg / 12.08 lb

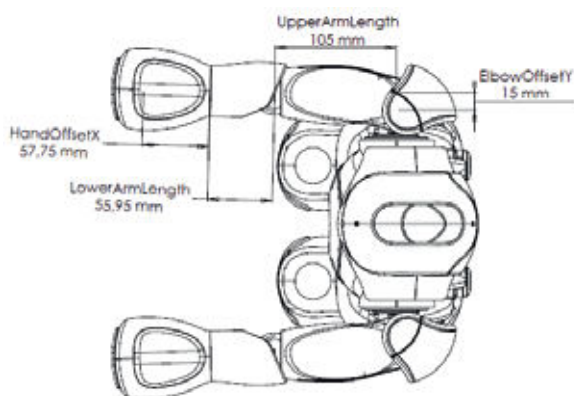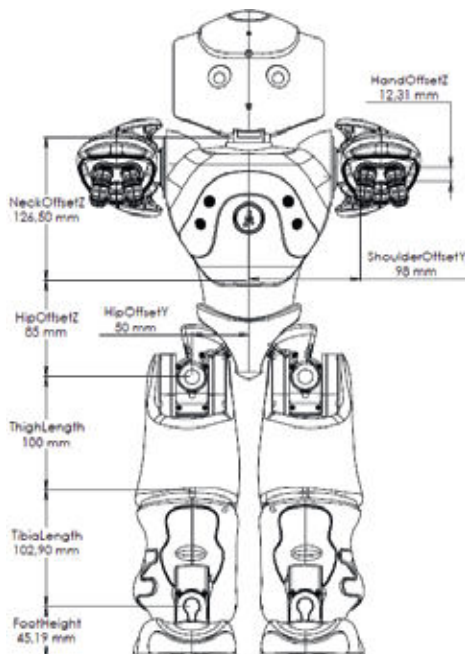

BRAIN SYSTEM

MOTHER BOARD

CPU	CPU processor	ATOM E3845
	Cache memory	2 MB
	Clock speed	1.91 GHz
RAM	4GB DDR3	
Flash memory	32GB eMMC	

HUMAN INTERACTION

LANGUAGES

Text to speech & Automatic speech Recognition	Czech, Danish, Dutch, English, Finnish, French, German, Italian, Japanese, Greek, Polish, European Portuguese, Brazilian Portuguese, Spanish, Swedish, Russian, Turkish, Arabic, Brazilian, Standard Mandarin, Taiwanese Mandarin, Norwegian.
--	---

AUDIO



Loud Speakers	Left & Right	
	Diameter	40 mm
	Impedance	4 Ω
	Sp level	87 dB/w +/- 3 dB
	Freq range	up to ~20 kHz
	Input	2 W
Microphones	x4 top of head	
	Sensitivity	20 mV/Pa +/-3 dB at 1 kHz
	Frequency range	150 Hz -12 kHz

LEDs

Placement	Quantity	Description
Tactile Head	12	16 White levels
Eyes	2x8	RGB FullColor
Ears	2x10	16 Blue levels
Chest button	1	RGB FullColor
Feet	2x1	RGB FullColor


NAO⁶

P.3

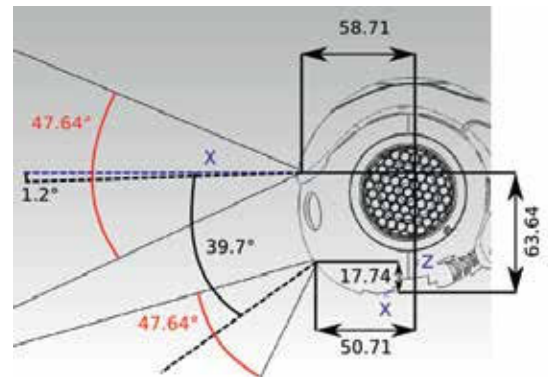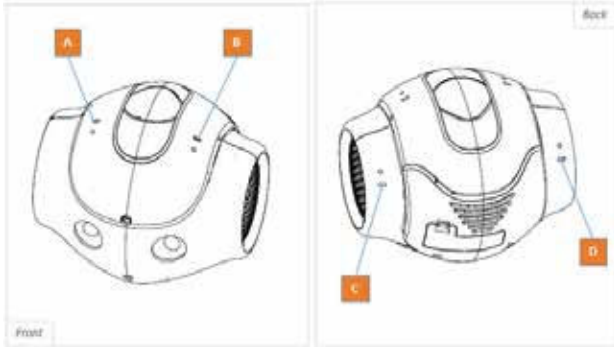

2D CAMERAS

Cameras	2 front of head	
Sensor model	OV5640	
Sensor type	SoC - CMOS Image Sensor	
Imaging array	Resolution	5 MP
	Size	1/4 in
	Active Pixels (HxV)	2592 x 1944
Sensitivity	Pixel size	1.4 x 1.4 μ m
	Dynamic range	68 dB @8x gain
	Signal/Noise ratio (max)	36 dB
	Responsivity	600 mV/lux-sec
Output	Camera output	640 x 480 @30 fps
	Data Format	YUY & RGB
	Shutter type	Rolling Shutter/ frame exposure
View	Field of view	67.4° DFOV (56.3° HFOV, 43.7° VFOV)
	Focus range	10 cm ~ ∞ $\approx$ 1 in - ∞
	Focus type	Auto focus

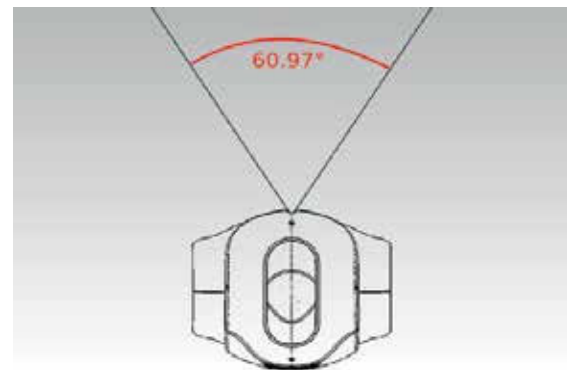

ENVIRONMENT SENSORS

INERTIAL UNIT

Gyrometer	1	
	Axis	3
	Precision	5%
	Angular speed	500° /s approx.
IMU	1	
	Axis	3
	Precision	10%
	Nominal acceleration	2 g approx.

FRAMERATES

	Top Camera	Bottom Camera
Resolution		
320x240 px	@15, 30 fps	@15, 30 fps
640x480 px	@15, 30 fps	@15, 30 fps
1280x960 px	@15, 30 fps	@10, 15 fps
1920x1080 px	@15, 30 fps	-
2560x1920 px	@15 fps	-


Note: using the video stream in remote highly depends on the network and the video resolution chosen. All frame rates depend on the CPU usage. Values are calculated with a CPU fully dedicated to images gathering.

NAO⁶

P.4


SONAR

Emitters	2 on front
Receivers	2 on front
Frequency	40 kHz
Resolution	1 cm @50 cm
Detection Range	0.20 m to 0.80 m
Effective Cone	60°

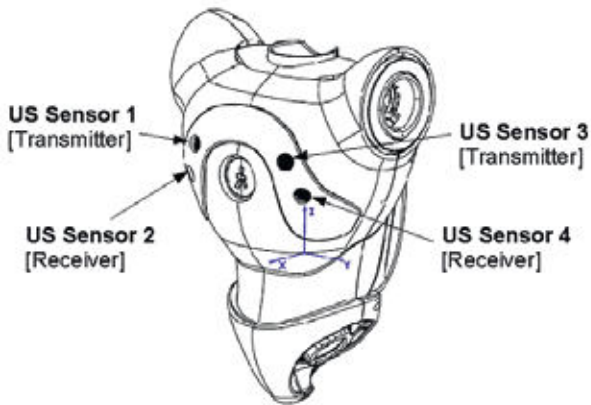

FSR (FORCE SENSITIVE RESISTORS)

Range	0 to 25 N
Location	4 per feet
Sensitivity	40 gr approx.

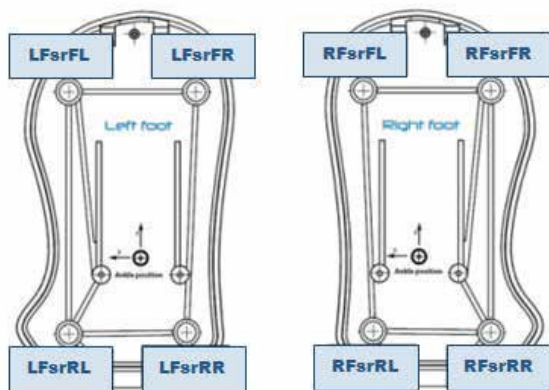

CONTACT SENSOR

Chest Button	✓
Foot Bumper	✓
Tactile Head	✓
Tactile Hand	✓

ENERGY

ROBOT BATTERY

Battery	Type	Lithium-Ion
	Nominal voltage/capacity	21.6 V / 2.9 Ah
	Max charge voltage	25.2 V
	Recommended charge current	1.8 A
	Max charge / discharge current	2.1 A / 2.0 A
	Energy	62.5 Wh
	Charging duration	90 min
	Autonomy	60 min (Active use) 90 min (Normal use)

BATTERY CHARGER

Input	100 to 240 Vac – 50/60 Hz – Max 1.2 A
Output	25.2 Vdc – 2 A

MOTION

DEGREES OF FREEDOM

Head	2
Arm (in each)	5
Pelvis	1
Leg (in each)	5
Hand (ineach)	1


MOTOR SPECIFICATIONS

Motor type Brush DC Coreless

POSITION OF MOTORS

		Gear Ratio	Motor type
Head joints	HeadYaw	150.27	3
	HeadPitch	173.22	3
Arm joints	ShoulderPitch	150.27	4
	ShoulderRoll	173.22	3
	ElbowYaw	150.27	3
	ElbowRoll	173.22	3
	WristYaw	50.61	2
Hand joints	Hand/ Fingers	36.24	2
Leg joints	HipYawPitch	201.3	1
	HipRoll	201.3	1
	HipPitch	130.85	5
	KneePitch	130.85	5
	AnklePitch	130.85	5
	AnkleRoll	201.3	1

For details of type and gear ratio, see below.

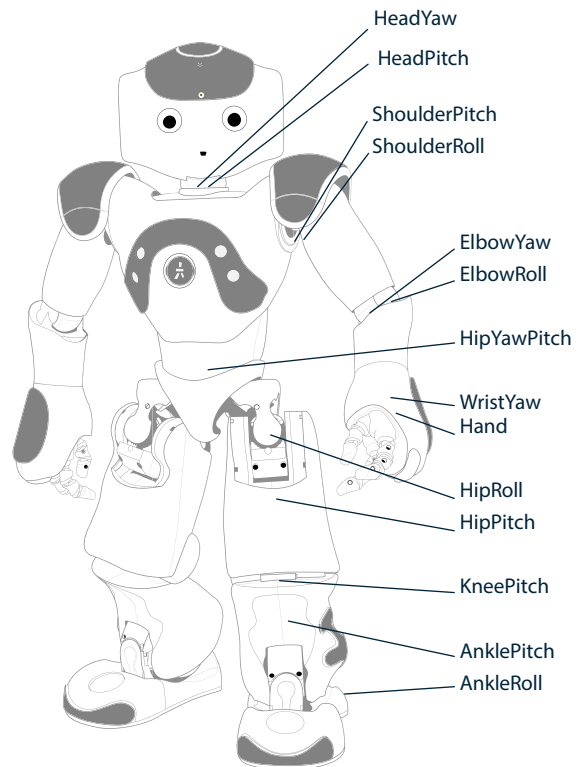

MOTOR TYPE

	Motor type 1	Motor type 2	Motor type 3	Motor type 4	Motor type 5
Make	22NT82213P	17N88208E	16GT83210E	DCX 16S	22NT Z20
No load speed (rpm)	8700 ±10%	8400 ±12%	10700 ±10%	11400 ±10%	8700 ±10%
Stall torque (mNm)	65 ±8%	9.4 ±8%	14.3 ±8%	22.4 ±10%	65 ±10%
Continuous torque (mNm)	17.8 max	4.9 max	6.2 max	2.6 max	17.8 max

JOINT MOVEMENT ENCODERS

MRE (Magnetic Rotary Encoder)	36 Using hall effect sensor technology Precision: 12 bits / 0.1°
--	--

NAO⁶

P.6

CONNECTIVITY

CONNECTION

Ethernet	1×RJ45 - 10/100/1000 BASE T
WIFI	IEEE 802.11a/b/g/n
WPAN IEEE 802.15.1 (Bluetooth)	4.0 (LE)

SOFTWARE

Open Nao	Embedded GNU/Linux Distribution based on Gentoo
Architecture	86
Programming	Embedded: C++ / Python Remote: C++ / Python / .NET / Java / MatLab

CERTIFICATIONS & APPROVAL

EMF	IEC/EN 62311
EMC	EN 301 489-1 / EN 301 489-17 / CISPR22 / CISPR24
Radio	EN 300 328 / EN 301 893
Safety	IEC/EN 60950
Europe	 
Japan	  207-13DNU A  D 14-0018 20 1
USA	Contains FCC ID : NKR-DNUA134
Taiwan	Contains NCC ID / 內含無線模組 NCC ID: CCAF 15LP30T5
Chine	CMIIT ID: 2015DJ5057

DISTRIBUTOR

PRO ČESKOU REPUBLIKU

EXACTEC

Vzdušná 56/4
Liberec, 460 01

Tel: 485 151 447
info@exactec.com

www.softbankrobotics.cz